




WALL MOUNTED
FIRE SUPPRESSION

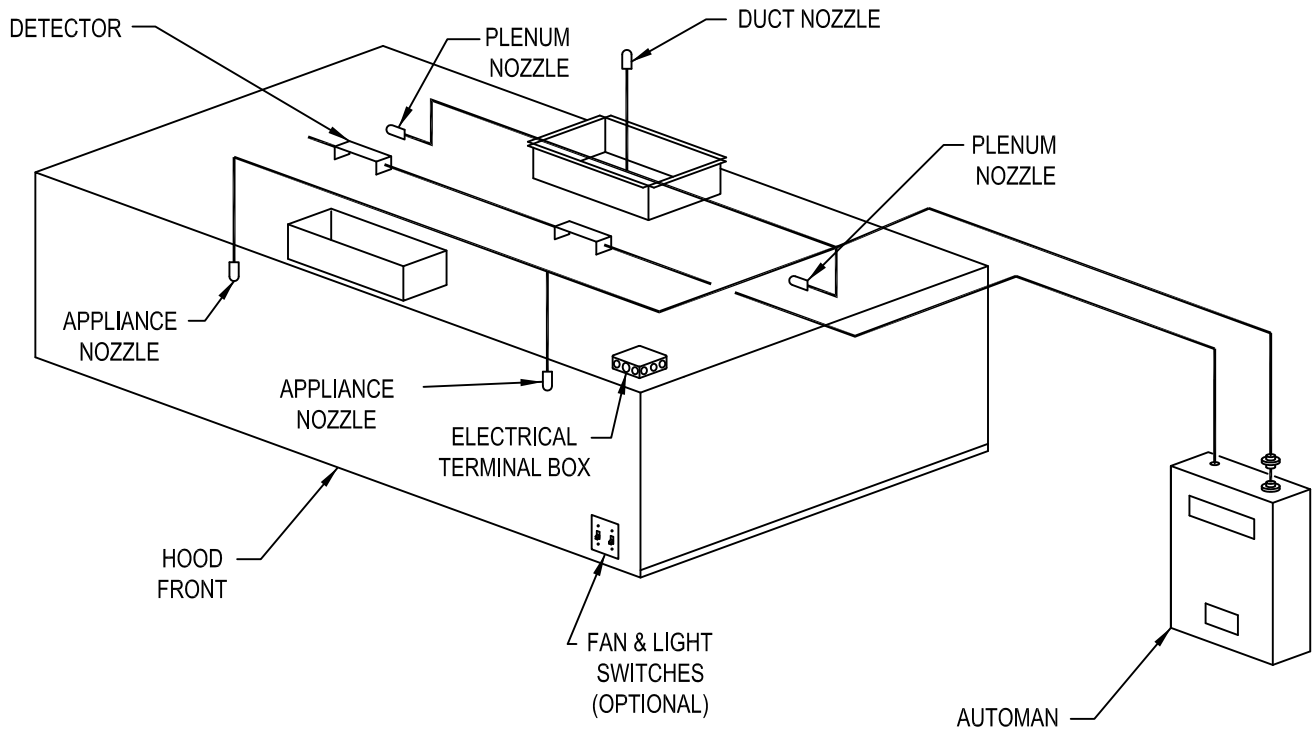

System Components

Regulated Release Assembly (Automan), Liquid Agent Tank(s), Detectors, Piping with Nozzles, Manual Pull Station, and Gas Shut-Off Valve.

Mounting

Wall mounted fire suppression systems consist of factory pre-piped detection and agent supply lines in the hood. Requires field mounting and hook-up of Automan, tank enclosure, remote pull station, and gas shut-off valve.

Field Connections

The system is field connected by a qualified and insured fire equipment distributor. It is the responsibility of Larkin Industries, Inc. to contract final hook-up of a system. It is the responsibility of the customer to notify Larkin Industries, Inc., 5 working days prior to required day of final hook-up.

Note: This is a product application guideline only. Each equipment package is specifically designed to meet job requirements and building code authorities.