




FAN CONTROL



Larkin Industries, Inc. Fan Control (FC) electrical packages may be surface mounted or recessed mounted (with optional trim ring) in a 12" x 22" x 6" ETL Listed stainless steel enclosure with a hinge door and latch. The package shall be pre-wired, including contactors or starters with overloads and terminal strip. Light switch and pilot lighted fan switch shall be mounted on face of control panel or may be remote mounted. Fans shall be interlocked and the system will be interfaced with the automatic fire suppression to shut down the supply fan, lights and allow continuous exhaust fan operation in fire. The FC may also automatically energize the fan(s) prior to the cooking operations commencing in compliance with IMC 507.1.1 by means of a Cal-Stat sensor (by others).

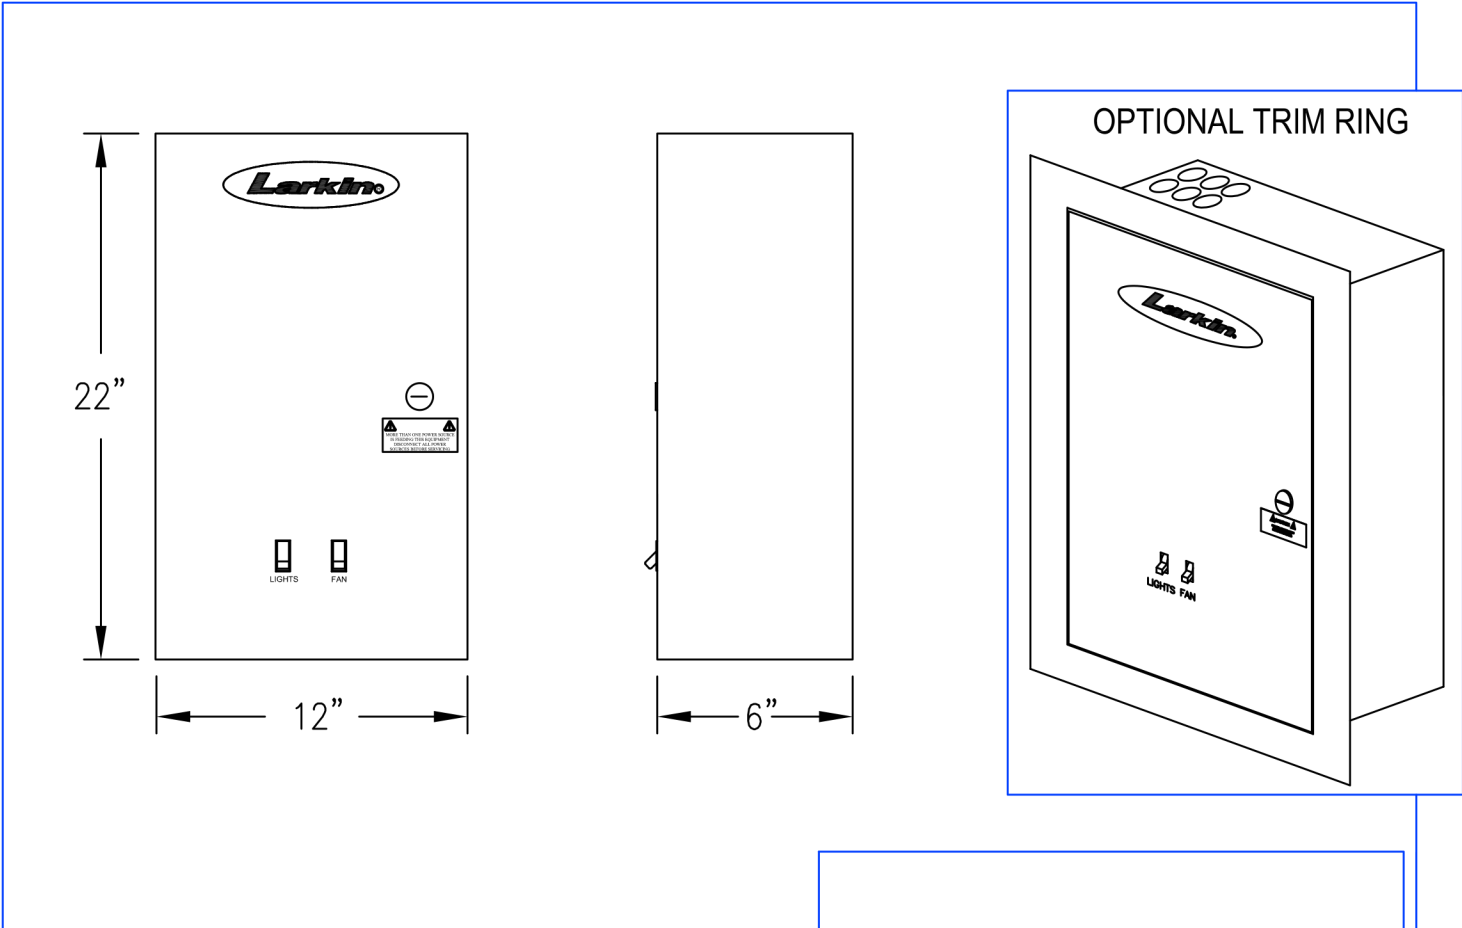